

self priming surface pumps

PURA JET 550

Light weight portable self-priming pump. Ideal for garden irrigation or as a fixed installation for domestic water supplied from a well or a spring. Comes complete with suction and discharge hose fittings and a handle for easy carrying


Maximum suction lift 7 mtrs with foot valve
 Maximum head 40 mtrs
 Maximum flow 45 lpm



PURA JET 550 £175.00


CAM PENTAX

Cast iron self priming Jet pumps mainly used for water boosting systems, washing systems and garden irrigation. Cast iron pump bodies and motor brackets. Impeller, diffuser and venturi system made from technopolymer. Clean water only with a maximum liquid temperature of 50°C. Maximum suction height of 7 metres with footvalve.

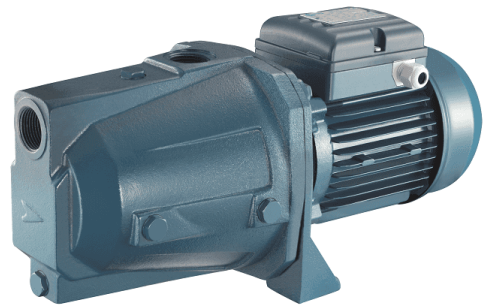

CAM 100 M £255
 CAM 100 T £255
 CAM 300 M £495
 CAM 300 T £495

PERFORMANCE GRAPH

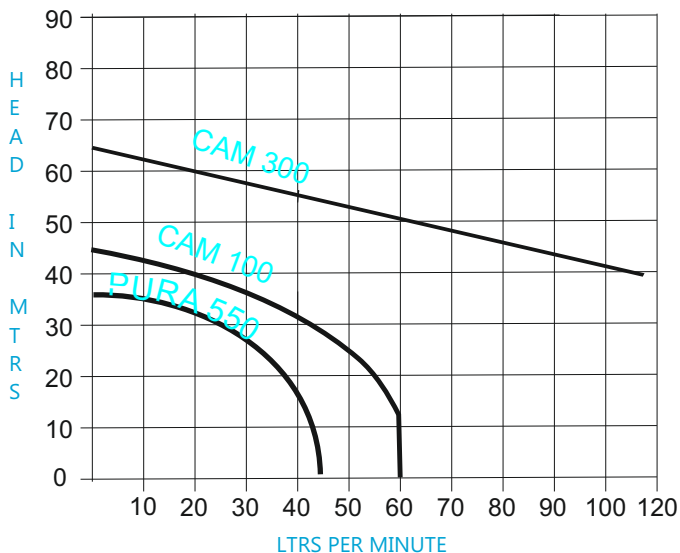

TYPE	HP	KW	VOLTAGE	AMP
PURA JET 550	0.8	0.6	230V	2.5
CAM 100 M	1	0.7	SINGLE PHASE 230V	4.7
CAM 100 T	1	0.7	THREE PHASE 415V	2.3
CAM 300 M	3	2.2	SINGLE PHASE 230V	12.6
CAM 300 T	3	2.2	THREE PHASE 415V	4.8

All prices are exclusive of VAT

TP PUMPS Limited
 the pumping and filtration specialists

t 01769 579487
 e sales@tppumps.co.uk
 w www.tppumps.co.uk